


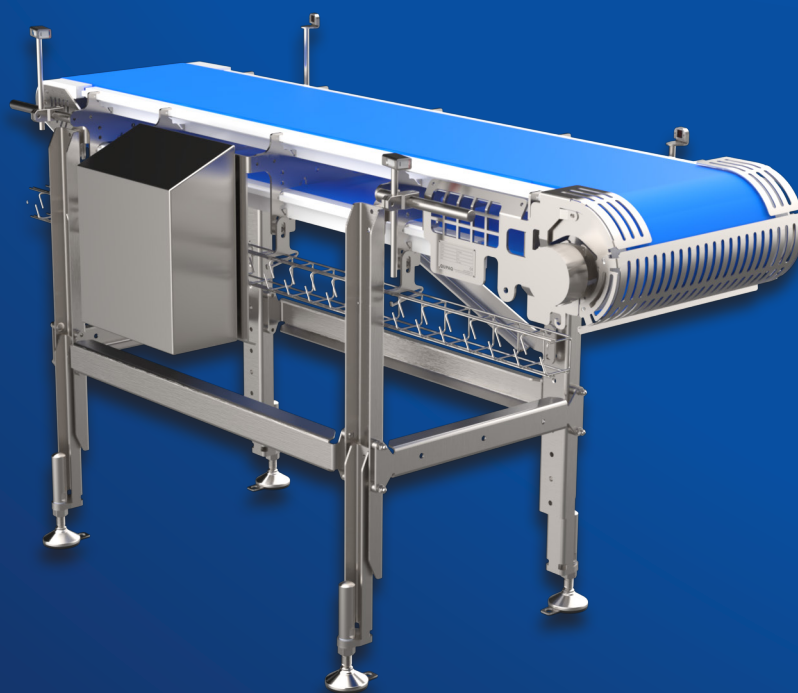

Standard CONVEYOR

Reliable Tray Conveying

The Standard Conveyor is designed for stable and efficient transport of trays in food production lines. With a 300 mm belt width and a drum motor drive, it delivers smooth and reliable conveying. Electrical control with a frequency converter is included in a stainless steel control cabinet.

Flexible Configuration

The Standard Conveyor can be produced in any length to match customer requirements and is available with or without flights. Optional adjustable guides ensure accurate tray positioning on the belt, making the conveyor adaptable to different tray formats and line layouts.

Compact & Hygienic Design

Built entirely in stainless steel, the Standard Conveyor is made for harsh production environments. Its open construction and small footprint support easy industrial cleaning, low maintenance, and straightforward integration into existing or new production lines.


QUPAQ®
ANY FOOD IN ANY TRAY

Specifications

Standard Conveyor

Operational Temperature	Humidity	Weight	Steel Quality	IP Class	Noise Level
5°-40° C	Min. 10% Max. 90%	Approx. 75 kg	EN 1.4301 AISI 304	*IP65	< 80 dB

Power Supply	Power Consumption	Full-Load Current	Max SCCR (Ik Max)	Max Fuse	Frequency
200-240V L1 + N (L1 + L2)	0.50 kW	2.16 A	6 kA	16 A	50-60 Hz

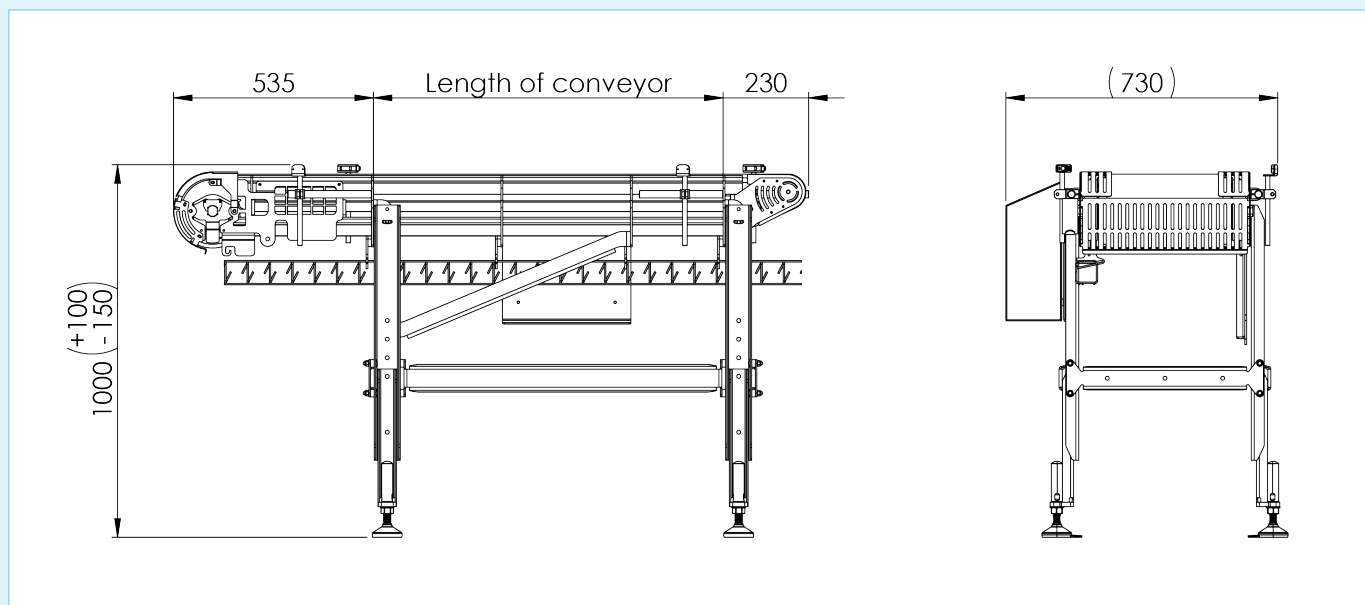

The illustrations and specifications are of the Standard Conveyor.

Specifications and photos are intended as a guide and can be changed by QUPAQ without notice. We make reservations for misprints and typing errors.

*Although the IP rating stated in the table is IP65, the machine incorporates additional components with higher protection ratings, up to IP69K.

QUPAQ

Erhvervsparken 16
9700 Broenderslev
Denmark

P. +45 96 46 76 00
qupa@qupa.com
qupa.com

QUPAQ®
ANY FOOD IN ANY TRAY