



Easy DIVERGER

Flexible Diverging or Turning

The Easy Diverger splits your product flow from a single lane to twin lane, which maximizes your tray sealer capacity. This multifunctional machine can also transform into a tray turner, making it a smart, space-saving solution that fits into both new and existing production lines.

Quick Changeover, Full Control

Switching between tray sizes or functions takes less than a minute, thanks to a fully electrical recipe control system. With easy integration, electrical control, and intuitive setup, the Easy Diverger is designed to keep your production running smoothly and efficiently.

Hygienic & Cost-Effective

The hygienic and open design ensures easy and effective cleaning, keeping your production area sanitary.

Built for long-term performance, the Easy Diverger is a cost-effective way to automate and optimize your line.


QUPAQ®
ANY FOOD IN ANY TRAY

Specifications

Easy Diverger

Capacity	Operational Temperature	Humidity	Weight	Steel Quality	IP Class
Diverging: Up to 140 trays/min Turning: Up to 100 trays/min	5°-40° C	Min. 10% Max. 90%	Approx. 225 kg	EN 1.4301 AISI 304	*IP65

Noise Level	Power Supply	Power Consumption	Full-Load Current	Max SCCR (Ik Max)	Max Fuse	Frequency
< 80 dB	3×400V + N	1.65 kW	3.40 A	6 kA	13 A	50 Hz

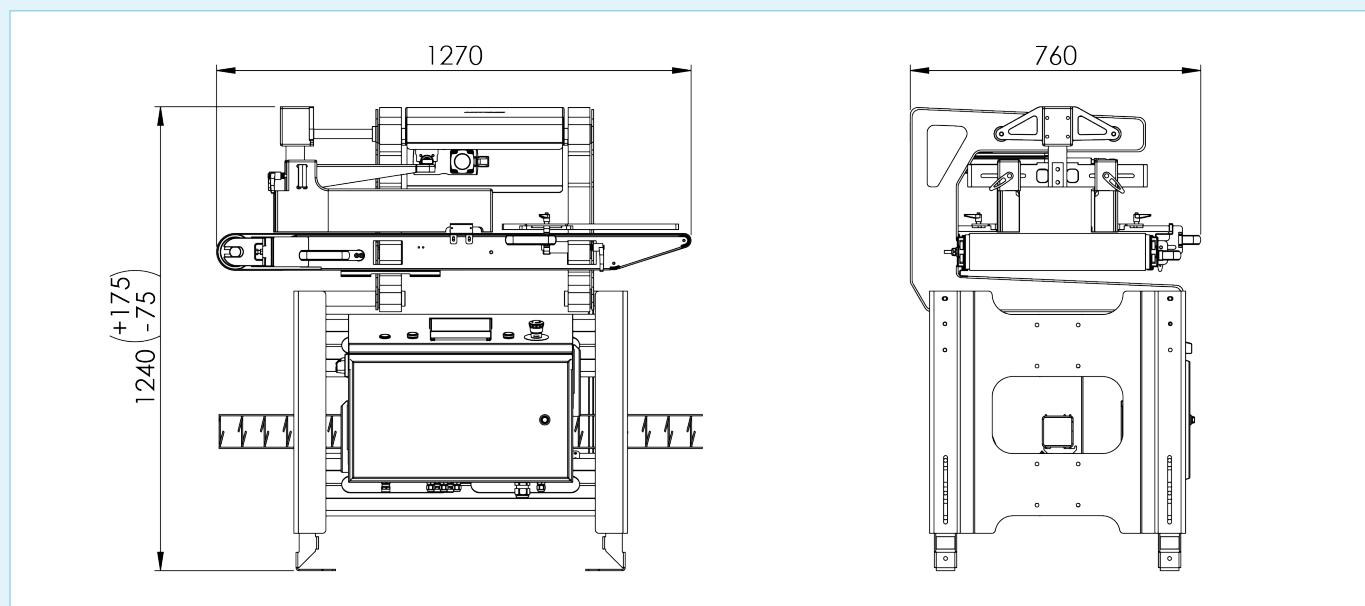

The illustrations and specifications are of the Easy Diverger.

Specifications and photos are intended as a guide and can be changed by QUPAQ without notice. We make reservations for misprints and typing errors.

*Although the IP rating stated in the table is IP65, the machine incorporates additional components with higher protection ratings, up to IP69K.

QUPAQ

Erhvervsparken 16 P. +45 96 46 76 00
9700 Broenderslev qupa@cupaq.com
Denmark cupaq.com

QUPAQ®
ANY FOOD IN ANY TRAY