



Flex ALIGNER

Precise Product Alignment

The Flex Aligner ensures accurate alignment and controlled shifting of products before downstream processing. It handles up to 140 products per minute and corrects product position within +/- 60 mm, ensuring consistent orientation and optimal line flow.

Flexible & Intelligent Handling

The Flex Aligner supports both right- and left-handed configurations and features an adjustable conveyor with up to 20° tilt. The standard version includes length measurement, while optional features such as a scanner and reject function remove products outside specification for improved quality control.

Compact & Hygienic Design

With a small footprint and modular construction, the Flex Aligner integrates easily into existing production lines. Built with a focus on hygiene, reliability, and easy maintenance, it is well suited for demanding food production environments.


QUPAQ®
ANY FOOD IN ANY TRAY

Specifications

Flex Aligner

Capacity	Operational Temperature	Humidity	Weight	Steel Quality	IP Class
Up to 140 pieces/min (product dependent)	5°-40° C	Min. 10% Max. 90%	Approx. 100 kg	EN 1.4301 AISI 304	*IP65

Noise Level	Power Supply	Power Consumption	Full-Load Current	Max SCCR (Ik Max)	Max Fuse	Frequency
< 80 dB	200-240V L1 + N (L1 + L2)	0.92 kW	4.00 A	6 kA	16 A	50-60 Hz

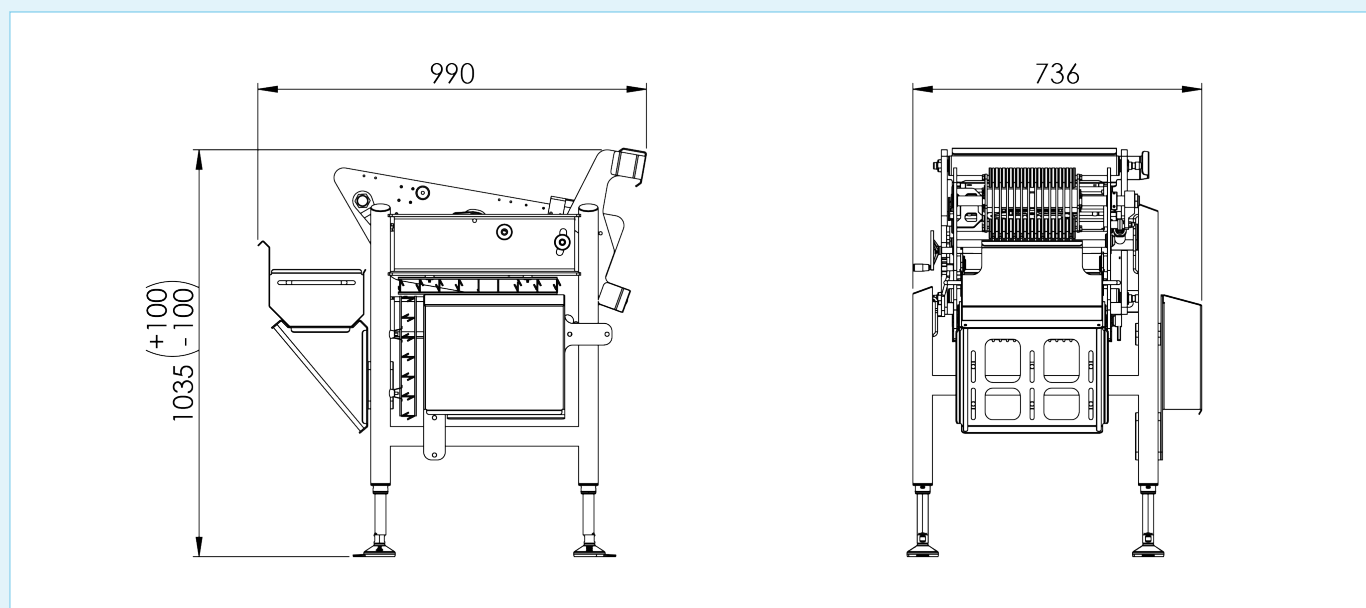

The illustrations and specifications are of the Flex Aligner.

Specifications and photos are intended as a guide and can be changed by QUPAQ without notice. We make reservations for misprints and typing errors.

*Although the IP rating stated in the table is IP65, the machine incorporates additional components with higher protection ratings, up to IP69K.

QUPAQ

Erhvervsparken 16 P. +45 96 46 76 00
9700 Broenderslev qupaq@qupaq.com
Denmark qupaq.com

QUPAQ®
ANY FOOD IN ANY TRAY