



Product REJECTOR

Compact & Efficient Solution

The Product Rejector is designed for precise and reliable sorting of products that do not meet the set requirements.

With a compact design and high capacity, this stand-alone machine fits easily into existing production lines without compromising speed or efficiency.

Automatic Adjustment

All parameters for length, width, and product flow are automatically adjusted according to the selected recipe, which ensures quick changeovers between different product types. The machine is operated via an intuitive HMI panel, which gives the operator full control and easy access to all settings.

Flexible Integration

With its small footprint and modular design, the Product Rejector can be easily integrated into any production line. It is designed with a focus on operational reliability, high hygiene, and easy maintenance.

Rejected products can be collected in a box, trolley, or transported away via a conveyor - depending on the desired production setup.


QUPAQ®
ANY FOOD IN ANY TRAY

Specifications

Product Rejector

Capacity	Operational Temperature	Humidity	Weight	Steel Quality	IP Class
Up to 200 pieces/min (product dependent)	5°-40° C	Min. 10% Max. 90%	Approx. 180 kg	EN 1.4301 AISI 304	*IP65

Noise Level	Power Supply	Power Consumption	Full-Load Current	Max SCCR (Ik Max)	Max Fuse	Frequency
< 80 dB	3×400V + N	3 kW	1.64 A	6 kA	13 A	50 Hz

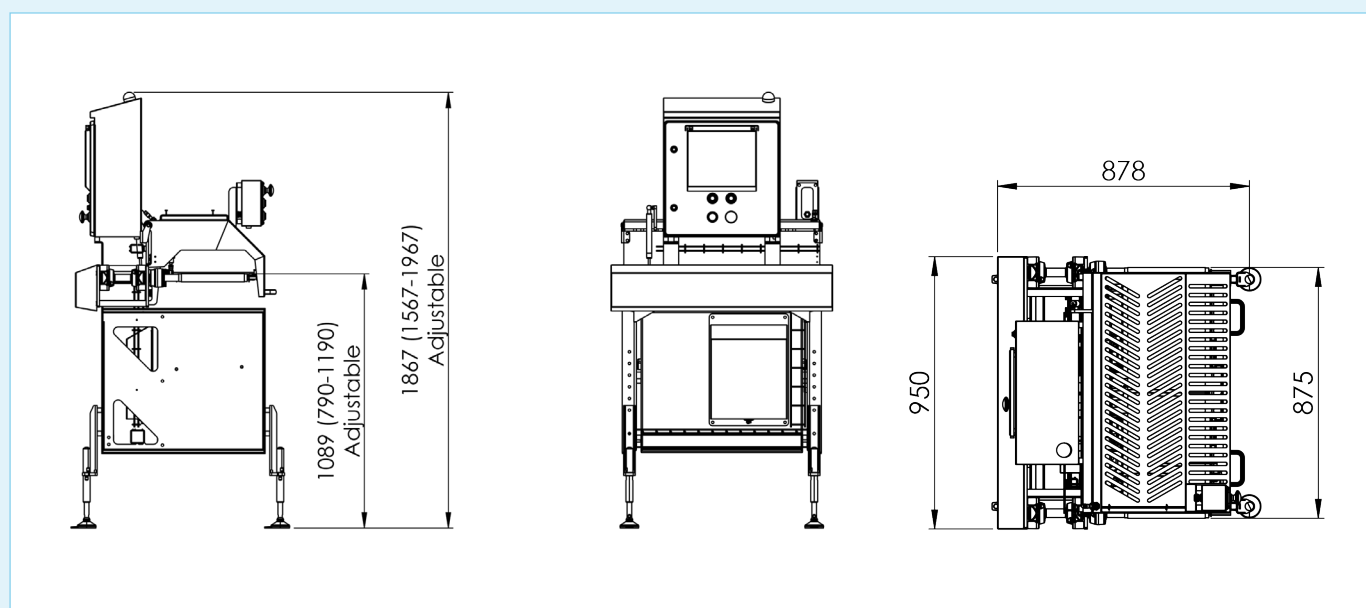

The illustrations and specifications are of the Product Rejector.

Specifications and photos are intended as a guide and can be changed by QUPAQ without notice. We make reservations for misprints and typing errors.

*Although the IP rating stated in the table is IP65, the machine incorporates additional components with higher protection ratings, up to IP69K.

QUPAQ

Erhvervsparken 16 P. +45 96 46 76 00
9700 Broenderslev qupa@qupa.com
Denmark qupa.com

QUPAQ®
ANY FOOD IN ANY TRAY