



# Smart RACK BASIC

## Compact Footprint

The Smart Rack Basic delivers efficient tray denesting in a compact footprint, which makes it ideal for space-conscious production lines.

With a speed of up to 70 trays per minute, it ensures a smooth and steady workflow.

## Quick Tool Change

The heart of the Smart Rack Basic lies in the Smart Tool, an intelligently designed denesting tool that can be effortlessly changed within a minute. This smart design reduces downtime during tray changeovers, allowing you to maintain efficiency while switching between formats or tray types with ease.

## Hygienic & Built to Last

Handcrafted in Denmark and made from stainless steel, the Smart Rack Basic is designed for hygiene, durability, and minimal maintenance. With fewer moving parts and easy cleaning access, it offers a reliable, cost-effective solution for modern food production environments.


**QUPAQ®**  
ANY FOOD IN ANY TRAY

# Specifications

## Smart Rack Basic

| Capacity           | Humidity             | Operational Temperature | Weight        | Steel Quality         | IP Class |
|--------------------|----------------------|-------------------------|---------------|-----------------------|----------|
| Up to 70 trays/min | Min. 10%<br>Max. 90% | 5°-40° C                | Approx. 75 kg | EN 1.4301<br>AISI 304 | *IP65    |

| Noise Level | Power Supply                    | Power Consumption | Full-Load Current | Max SCCR (Ik Max) | Max Fuse | Frequency |
|-------------|---------------------------------|-------------------|-------------------|-------------------|----------|-----------|
| < 80 dB     | 200-240V<br>L1 + N<br>(L1 + L2) | 0.93 kW           | 4.02 A            | 6 kA              | 16 A     | 50-60 Hz  |

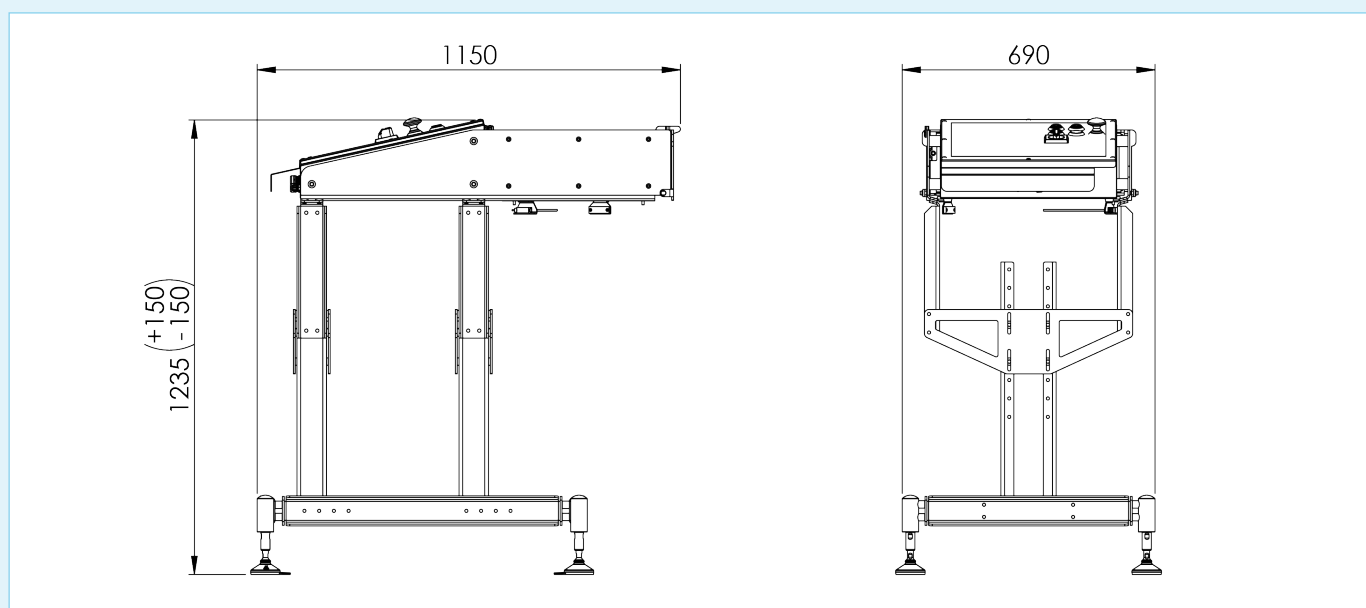

The illustrations and specifications are of the Smart Rack Basic.

Specifications and photos are intended as a guide and can be changed by QUPAQ without notice. We make reservations for misprints and typing errors.

\*Although the IP rating stated in the table is IP65, the machine incorporates additional components with higher protection ratings, up to IP69K.

### QUPAQ

Erhvervsparken 16 P. +45 96 46 76 00  
9700 Broenderslev qupa@qupa.com  
Denmark qupa.com

**QUPAQ®**  
ANY FOOD IN ANY TRAY