


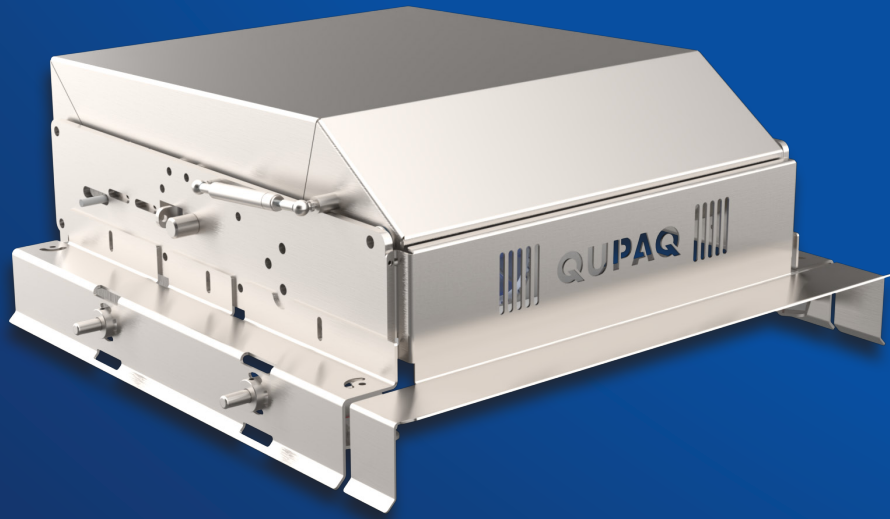

Easy OVERPUSHER

Precise Tray Pushing

The Easy Overpusher is designed to push trays from one conveyor to another and change the orientation of the tray, so they are presented in the correct direction, either short-edge or wide-edge leading, for seamless integration with the following processing equipment.

Stand Alone & Easy to Integrate

Built as a stand-alone machine, the Easy Overpusher fits into both new and existing production lines. It supports a wide range of tray sizes, from very small up to half-gastro (max. 325×265 mm), and maintains full control of the pushing process at speeds of up to 90 trays per minute, depending on shape and size.

Hygienic, Intelligent, & Efficient

With its hygienic design, the Easy Overpusher is built for performance with minimal maintenance needs. Its reliable operation and flexible integration help lower operating costs and shorten return on investment, which makes it ideal for high-volume, high-efficiency production environments.



QUPAQ®
ANY FOOD IN ANY TRAY

Specifications

Easy Overpusher

Capacity	Operational Temperature	Humidity	Weight	Steel Quality	IP Class
Up to 90 trays/min	5°-40° C	Min. 10% Max. 90%	Approx. 40 kg	EN 1.4301 AISI 304	*IP65

Noise Level	Power Supply	Power Consumption	Full-Load Current	Max SCCR (Ik Max)	Max Fuse	Frequency
< 80 dB	200-240V L1 + N (L1 + L2)	0.48 kW	2.07 A	6 kA	16 A	50-60 Hz

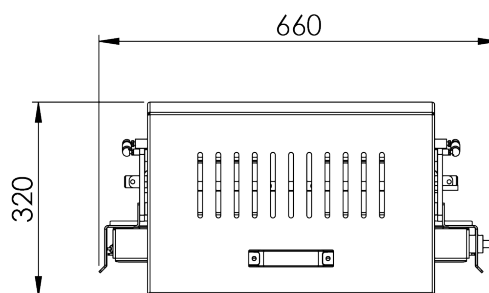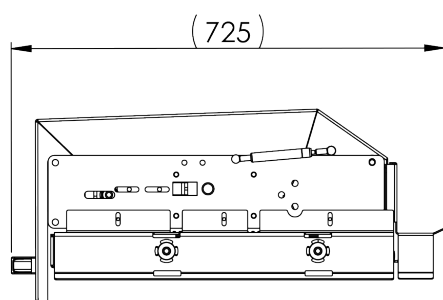

The illustrations and specifications are of the Easy Overpusher.

Specifications and photos are intended as a guide and can be changed by QUPAQ without notice. We make reservations for misprints and typing errors.

*Although the IP rating stated in the table is IP65, the machine incorporates additional components with higher protection ratings, up to IP69K.

QUPAQ

Erhvervsparken 16 P. +45 96 46 76 00
9700 Broenderslev qupa@qupa.com
Denmark qupa.com

QUPAQ®
ANY FOOD IN ANY TRAY