


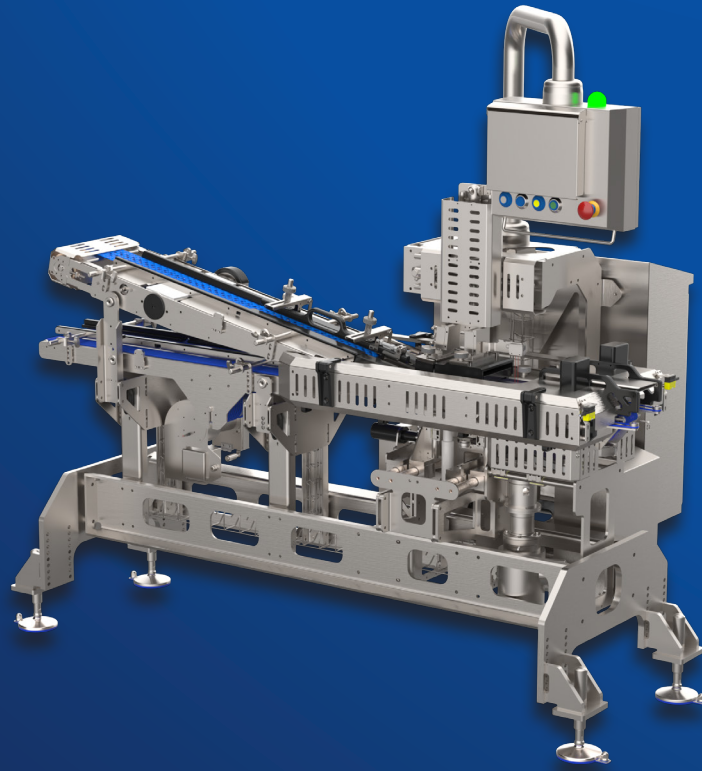

Lid Applicator

Precise Lid Placement

The Lid Applicator applies lids automatically as trays move through the machine - no pulsed stops, just smooth, continuous motion.

With various applications, it handles a wide range of tray and lid sizes and delivers up to 140 placements per minute with high precision.

Flexible & Intelligent Setup

Designed to integrate seamlessly with all equipment and other applications, this stand-alone machine easily adapts to your production layout. Available in left- or right-oriented versions, it supports fast, motorized, and safe changeovers via recipe selection on the OP panel, ensuring minimal downtime.

Compact & Hygienic Design

With a small footprint, the Lid Applicator fits into tight spaces without compromising performance. Its hygienic design supports industrial cleaning, and the system is built to handle lid and tray tolerances reliably. Operators benefit from easy access for cleaning, service, and adjustments.


QUPAQ®
ANY FOOD IN ANY TRAY

Specifications

Lid Applicator

Capacity	Air Consumption	Air Pressure	Tray + Lid Size Range	Operational Temperature	Humidity	Weight	Steel Quality
Up to 140 placements/min	5 L/min at 140 placements/min	6 bar	L: 80-320 mm W: 80-270 mm H: 25-100 mm	5°-40° C	Min. 10% Max. 90%	Approx. 610 kg	EN 1.4301 AISI 304

IP Class	Noise Level	Power Supply	Power Consumption	Full-Load Current	Max SCCR (Ik Max)	Max Fuse	Frequency
*IP65	< 80 dB	3×400-480V	1.17 kW	2.42 A	6 kA	16 A	50-60 Hz

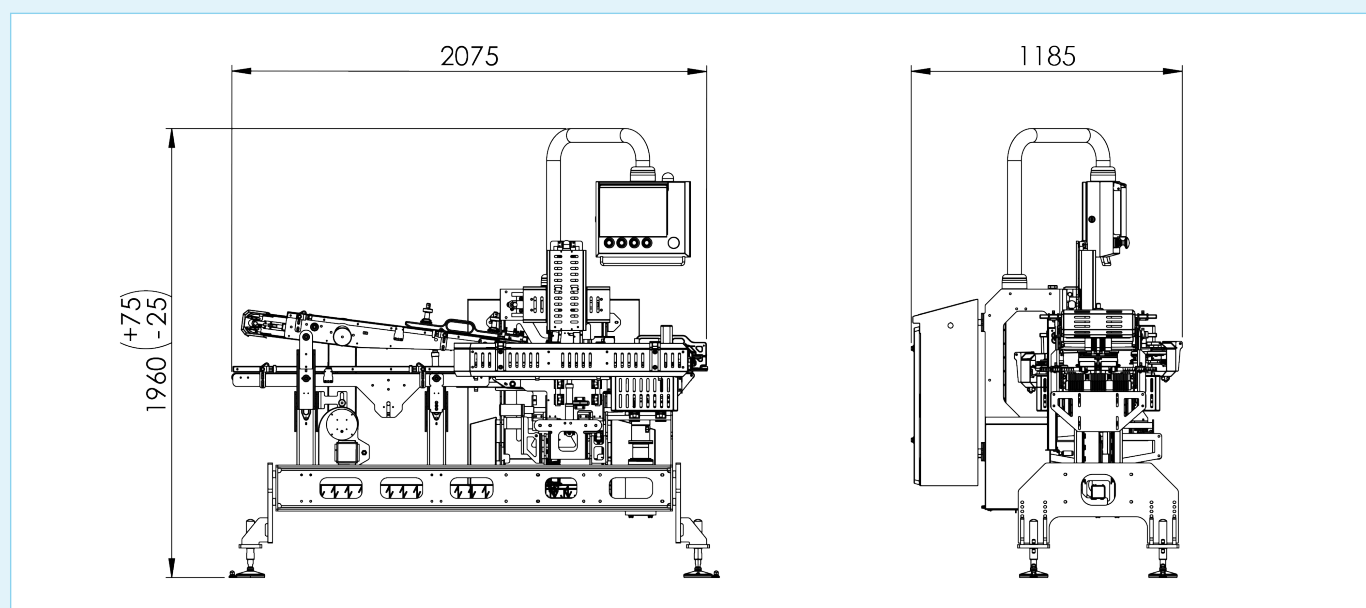

The illustrations and specifications are of the Lid Applicator.

Specifications and photos are intended as a guide and can be changed by QUPAQ without notice. We make reservations for misprints and typing errors.

*Although the IP rating stated in the table is IP65, the machine incorporates additional components with higher protection ratings, up to IP69K.

QUPAQ

Erhvervsparken 16 P. +45 96 46 76 00
9700 Broenderslev qupa@qupa.com
Denmark qupa.com

QUPAQ®
ANY FOOD IN ANY TRAY